

The Emergency Exit Sign is used as a marker and a locator of doors and emergency exits in aircraft cabins.

This unit is intended for VIP application or little A/C fuselage diameter when sign dimensions can be accepted by exception to the regulation.

This unit proposed in various finish, color and power supply totally fulfills the FAR / CS 25.812 (b)(1) requirements in term of brightness.

Its small thickness allows a direct installation by quick latch system on the honeycomb panel without flush-fitting.


**TECHNICAL DATA**

| | |
|-----------------------|---|
| Dimension: | 190 x 82 x 7.5 |
| Mass: | 0.255 kg |
| Power Supply: | See table |
| Electrical Interface: | Cable (length about 2 m) |
| Light Source: | White LED array. |
| Useful Life: | > 20 000 Operating Hours |
| Environmental Spec: | Tested & qualified according to RTCA DO160D |

Part description numbering system

| | | | |
|-------------|----------------------------------|----------|-------------------|
| 522- | 110 | Y | Z |
| | | ↓ | ↓ |
| | | | Finish code |
| | | | Power Supply code |
| Y | Power Supply | | |
| A | 6 VDC – 400 mA | | |
| B | 12 VDC – 200 mA. | | |
| D | 115 VAC 400 Hz – tbd mA | | |
| Z | Casing Finish & Color | | |
| 0 | Brushing G180 + OAS uncolored | | |
| 1 | Brushing G180 + OAS black | | |
| 2 | Brushing G400 + OAS uncolored | | |
| 3 | Brushing G400 + OAS black | | |
| 4 | Nickel Brushed n° 19 (Product) | | |
| 5 | Chrome brushed n° tbd (Product) | | |
| 6 | Gold | | |

Dimension

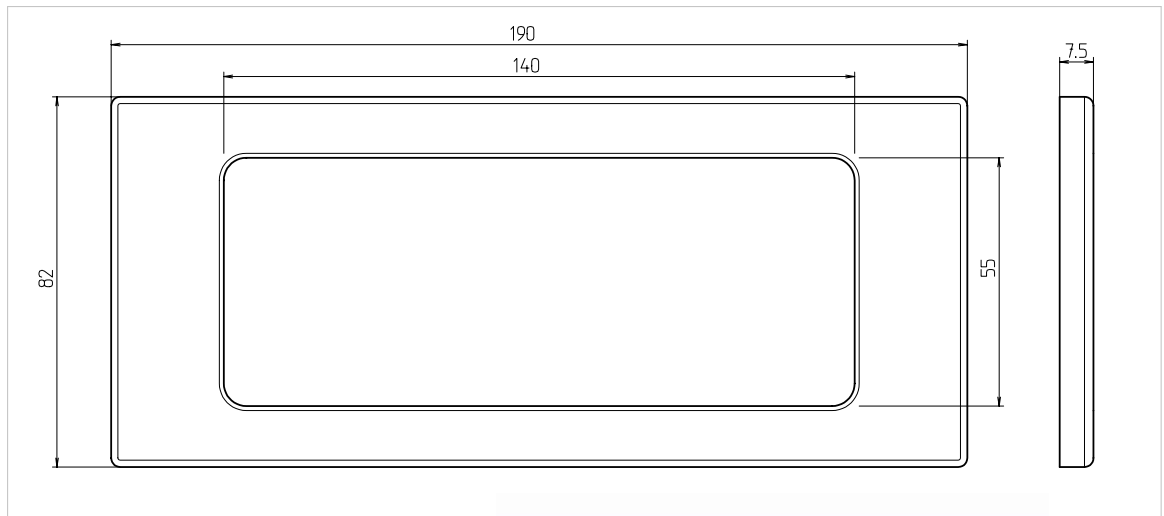

Mounting holder

P/N 533-10052

(Others mounting device type on request)

