

The Emergency Exit Sign is used as a marker and a locator of doors and emergency exits in aircraft cabins.

This unit proposed in various finish, color and power supply totally fulfills the FAR / CS 25.812 .

Its small thickness allows a direct installation by quick latch system on the honeycomb panel without flush-fitting.


**TECHNICAL DATA**

Dimension:	290 x 105 x 7.5
Mass:	0.385 kg
Power Supply:	See table
Electrical Interface:	Cable (length about 2 m)
Light Source:	White LED array.
Useful Life:	> 20 000 Operating Hours
Environmental Spec:	Tested & qualified according to RTCA DO160D

Part description numbering system

523-	110	Y	Z
		↓	↓
			Finish code
			Power Supply code
Y	Power Supply		
A	6 VDC – 550 mA		
B	12 VDC – 225 mA		
D	115 VAC 400 Hz – tbd mA		
Z	Casing Finish & Color		
0	Brushing G180 + OAS uncolored		
1	Brushing G180 + OAS black		
2	Brushing G400 + OAS uncolored		
3	Brushing G400 + OAS black		
4	Nickel Brushed n° 19 (Prodict)		
5	Chrome brushed n° tbd (Prodict)		
6	Gold		

Dimension

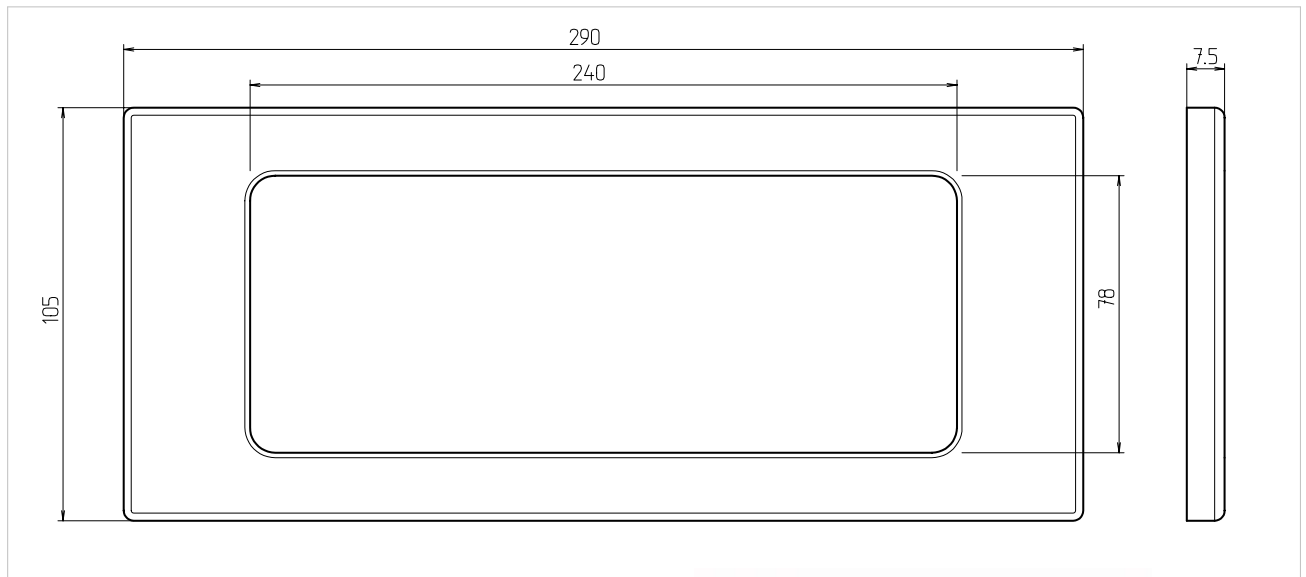

Mounting holder

P/N 523-10051

(Others mounting device type on request)

